



EURO RETI S.R.L.


di Commisso Vincenzo & C.

PRODUCTION DETAILS :

Barbed Wire IOWA :

Code	Ø Thickness	Meters roll	Weight kg	Pallets rolls
965	1,7	200	8,50	120
975	2,0	200	13,60	105
976	2,2	200	15,90	63

2 wires and 4 points

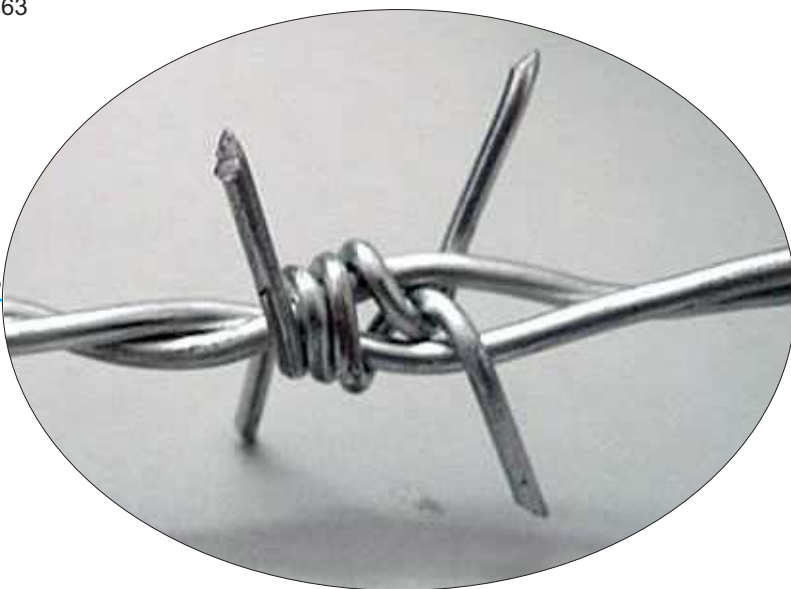

Detail of the product .

Barbed wire (IOWA) is produced by three different thickness, the design with 2 wires and 4 points interwoven with the horizontal wires make the product resistant and functional in use . Distance between points 10 - 13 centimeters.

Barbed wire is used to construct inexpensive fences and can also be used on top of walls, chain-link or other types of

General informations :

Description of the product : Galvanized round wire

Finishing : hot-dip galvanized.

Zinc Quantity (g/mq) 50,0 – 60,0 (UNI EN 10244-2)

Tensile (N/mm²): 400 – 550

Elongation (%): A = 8-15 %

Material: Vergella C5D2 Standard UNI EN 10016

Chemical Composition (%):

C:0,040 – 0,055 Mn:0,50 – 0,60 P:0,004 -0,008 S:0,014 – 0,019 Si:0,15 – 0,17

Note : 'Euro reti srl' can make changes without any notice.